


Relative Wear Resistance Ranges



Saint-Gobain Ceramics
Structural Ceramics

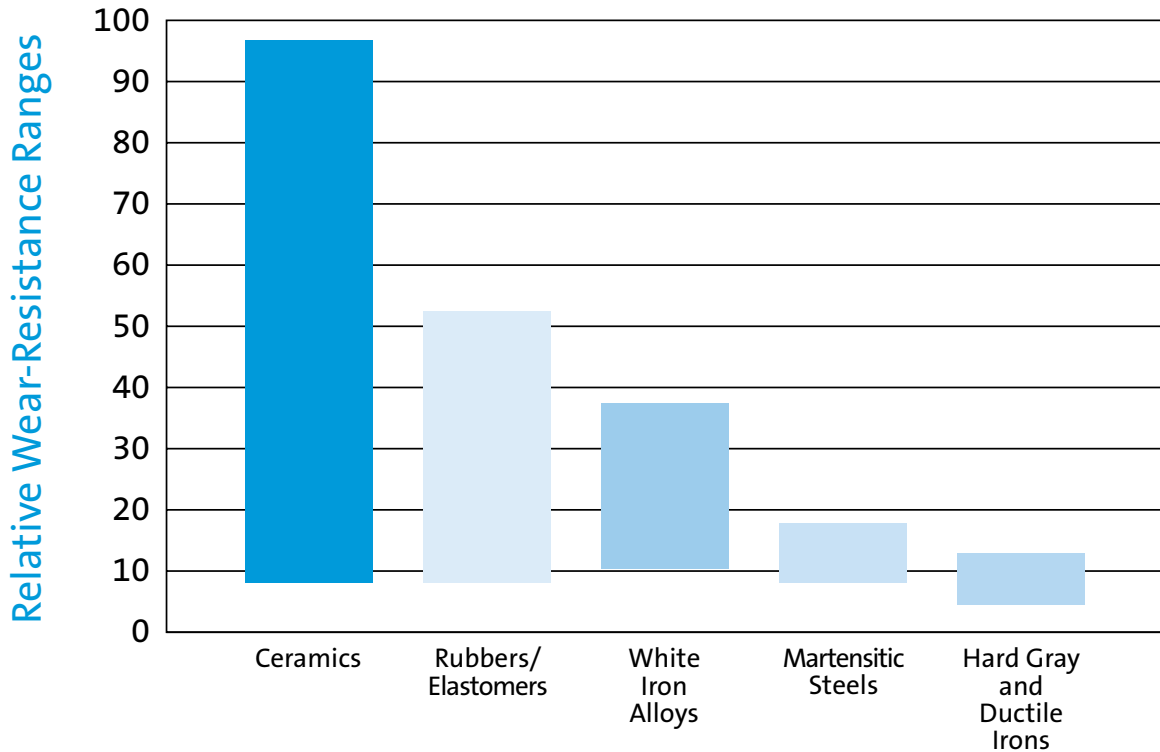

Wear resistance of each type of material may vary broadly.
(For easy comparison, the relative wear resistance of the best available ceramics is set at 100 under the standard GIW Coriolis wear testing conditions.)

Source: Engineering & Mining Journal. June, 2002

Saint-Gobain Ceramics
Structural Ceramics
Hexoloy® Products
23 Acheson Drive
Niagara Falls, New York 14303
Telephone: 716-278-6233
Fax: 716-278-2373
E-mail: scd.sales@saint-gobain.com
www.hexoloy.com

©2003 Saint-Gobain Ceramics
All Rights Reserved
Form No. B-1003-4 10/03
Printed in USA

The information recommendations, and opinions set forth herein are offered solely for your consideration, inquiry and verification and are not, in part or total, to be construed as constituting a warranty or representation for which we assume legal responsibility. Nothing contained herein is to be interpreted as authorization to practice a patented invention without a license.
Hexoloy® is a trademark of Saint-Gobain Ceramics.